



Imperial Versatile Pressure Mount Safety Gate

Model 100 User Guide

For openings 30" to 40 1/2"*

Optional 12" and 24" extension kits are available (not included) for openings up to 68".

⚠ Read all instructions before assembly and use of gate. Keep instructions for future use.

Imperial Products USA, Inc.
 PO Box 1181
 Geneva, FL 32732
 Phone: 407.349.2525
 www.Imperial-Products-usa.com

Package Contents:

- Main Gate
- 3" Extension Kit
- 5 1/2" Extension Kit
- Hardware Package

Hardware Package Contents:

- 001. Adjustment Knobs (4)
- 002. Safety Cups (4)
- 003. Metal Extension Tubes (2)
- 004. Mounting Spindles (4)
- 005. 1 1/2" Drywall Screws (8)
- 006. Spindle Housings (4)

***For safety, no more than two extensions can be added to the gate.**

Gate by Itself:	30"-32 1/4"
Gate with 3" Extension	32 1/2"-35"
Gate with 5.5" Extension	35 1/4"-37 3/4"
Gate with 12" Extension	32"-44 1/4"
3" and 5.5" Extensions	37 1/2"-40 1/2"
3" and 12" Extensions	44 1/2"-47"
5.5" and 12" Extensions	47 1/4"-49 3/4"
Gate with 24" Extension	53 1/4"-56"
3" and 24" Extensions	55 3/4"-58 1/2"
5.5" and 24" Extensions	58 1/2"-61 1/4"
12" and 24" Extensions	65 3/4"-68"

Optional Extension Kits:

- Model 100-12**
- Model 100-24**

Warning:

- **Remove the plastic covers and dispose immediately to avoid the risk of suffocation.**
- **Do not install the gate across window openings.**
- **Check daily that the gate is held firmly in place.**
- **The gate is primarily intended for pet containment.**
- **Check your child's development and discontinue use of the safety gate when the child is too skillful or too big for the gate. Do not use the gate if the child is able to open, climb over, or the gate's height is less than $\frac{3}{4}$ of your child's height.**
- **Do not hang or tie items, such as toys, over or on the gate.**
- **Do not climb over the gate or allow anyone else to do so.**
- **Discontinue use of the gate if it is not properly functioning or damaged in any way.**
- **To prevent death or serious injury, install and use the gate per manufacturer's instructions.**
- **The gate is not intended for children less than 6 months old or older than 24 months old.**
- **Not all accidents can be prevented with the use of this product. Never leave any child unattended.**
- **Never use the gate at the top of the stairs if used with children.**
- **This gate is not intended for commercial use.**

Before Installation:


The installation location must be structurally sound and the surface should be smooth and flat.

If mounting onto a surface that is not flat or smooth, such as brick, drywall, or other surfaces, a wooden board or additional hardware will be necessary to mount the gate correctly.

Gate cannot be mounted at the top of the stairs unless you use the included security cups. Installation at the top of the stairs is only for pets and is not intended for use with children. If mounting on the bottom of the stairs, the gate must be mounted on the lowest step to function correctly.

Before installing the gate, measure the desired opening to determine the number of extensions needed. The mounting spindles adjust independently.

When installed and used as instructed between two flat, clean, and structurally sound walls or surfaces, this gate meets or exceeds various International Safety Standards, including certification of conformity to ASTM – F-1004-09

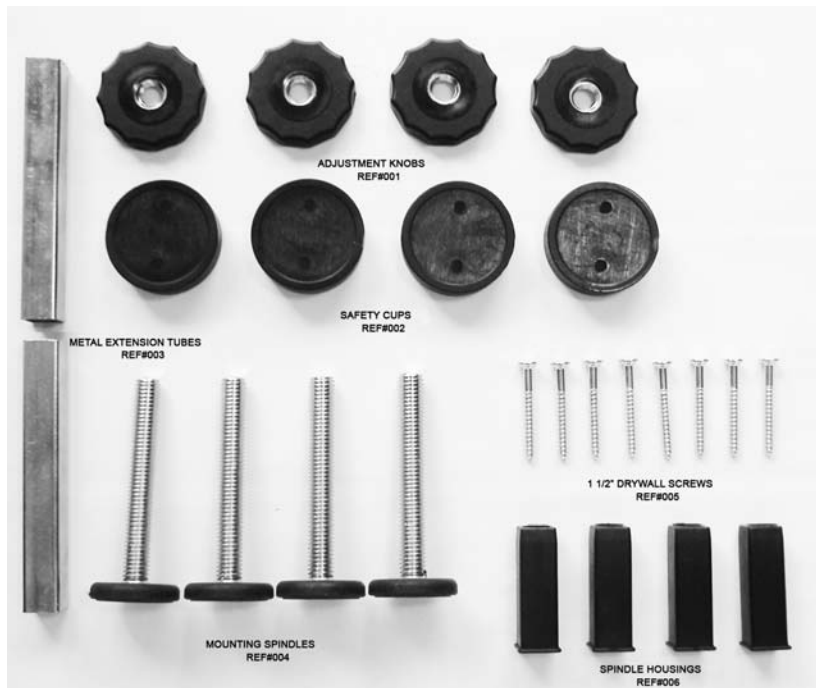

Steps for Installation:

Step 1: Prepare the mounting spindles.

Locate the 4 mounting spindles (004) and the 4 adjustment knobs (001). Place one adjustment knob on each spindle by turning it clockwise. Do not screw the adjustment knob all the way to the bottom of the mounting spindle as this may cause it to not function properly or get stuck.

Step 2: Attach the mounting spindles to the gate.

If you are not using any extensions on your gate, insert the 4 black plastic spindle housings (006) into the ends of the gate. Once they have been inserted, place a mounting spindle in each one. The gate is now ready to install.

If you are using extensions with your gate, slide the metal extension tubes into the holes on the side of the gate you are

adding the extension to. ***See note below.** Attach the extension to the gate by sliding the opening on the extension over the metal extension tube (003). Push the extension until there is no gap between the top and bottom bars of the gate and extension. Once the extension has been installed, insert the black spindle housings into the ends of the gate. After you have installed the spindle housing, place a mounting spindle in each one of the spindle housings. The gate is now ready to install.

Note: The 3" extension included with the gate has plastic extension tubes already attached. There is no need to use the metal extension tubes with that extension.

Optional Step: Installing the safety cups (002) on the wall.

If installed, the safety cups (002) help secure the gate in place. To install the safety cups, hold the gate where you want to install it so that it is level and centered. Then place the safety cups over the flat end of the mounting spindles. To ensure that the gate remains level and centered, turn the adjustment knobs until the safety cups are flush with the wall. Lightly mark around the perimeter of the safety cups. Remove the gate. Place the safety cups on the wall in the area that you have marked. Mark the holes in the safety cups where the screws need to be installed. Using the screws (005) provided in the hardware pack, firmly attach the safety cups to the wall. Do not over tighten the screws.

Step 3: Installing the Gate.

The gate is now ready for installation. Begin by placing the gate in the opening. Place the bottom rail of the gate on a flat surface and centered in the opening. Pull the mounting spindles out of the frame of the gate until the flat plastic piece is touching the wall. ****If using the safety cups, extend the mounting spindles until they are secure in the safety cups.** While holding the plastic part of the mounting spindle against

the wall, turn the adjustment knob counter-clockwise until it is against the gate. DO NOT TIGHTEN.

Step 4: Final Adjustments and finishing installation.

This is the last step to make sure that the gate is firmly mounted in the opening. Start with the bottom adjustment knobs. Turn the bottom adjustment knobs counter-clockwise until the adjustment knobs are firmly pressed against the frame. NOTE: There should be equal space on both sides of the gate. If you notice that there is not equal space on both sides, turn the adjustment knobs on the side that has more space clockwise to loosen them. Once you have loosened the tension, turn the adjustment knobs on the other side counter-clockwise to tighten and center the gate. Once you have done this, tighten the top adjustment knobs until they are firmly against the frame of the gate. After tightening the top adjustment knobs, make sure that the gate is still centered.

How to open or close the gate:

To Open: Open the moving walk-through portion of the gate by pushing the safety button on the lock lever first. As you are pushing the safety button, lift up on the lock lever. The lock lever should be raised to approximately a 45° angle. Once the lock lever has been raised, lift up on the moving gate portion. You can now move the gate either direction for pass through.

To Close the moving walk-through portion of the gate, lift the walk-through door up slightly and place the bottom bracing bracket on the bottom rail of the gate frame. Once the bracket has been lined up, lower the lock lever until it clicks into place.